

CODE NUMBER

33440001

DESCRIPTION


Fixture Connection Top or Rear Spud, Single Flush, G 1/2" Inlet, Integrated Control Stop, Battery with Hardwired Option, Front Accessible Wall Box, Concealed Sensor Urinal Flush Valve.

DETAILS

- Power Type: Battery with Hardwired Option
- Valve: Diaphragm
- Fixture Type: Urinal
- Fixture Connection: Top or Rear Spud Wall
- Box: Front Accessible
- Control Stop: Integrated
- Inlet: G 1/2"

FEATURES

- Easy repairable valve assembly in installation condition
- Ball valve for turning supply line On-Off in installation condition
- Can be installed on 6" wall
- Strong concealed box using flame retardant HDPE material that can withstand harsh construction conditions
- Mud guard for protection from debris during installation
- G 1/2" connections used (brass material)
- Sensor wall plate sold separately. See wall plates for various flush volume options: SGV-7905, SGV-7910, or SGV-7915.

**RECOMMENDED SPECIFICATION**

Valve shall be concealed with front access wall plate smaller than 6.3" x 5" and shall have integrated control stop.

ELECTRICAL SPECIFICATIONS

Solenoid Operator: 6 VAC

VALVE OPERATING PRESSURE (FLOWING)

10-80 PSI (69-552 kPa). Specific fixtures may require greater minimum flowing pressure - consult manufacturer requirements.

DOWNLOADS


- [Concealed Sensor Urinal Flush Valve Installation Instructions](#)
- [Concealed Sensor Urinal Flush Valve Repair & Maintenance Guide](#)

NOTES

All information contained within this document subject to change without notice.

[Find a compatible urinal](#) for this flush valve.

ROUGH-IN

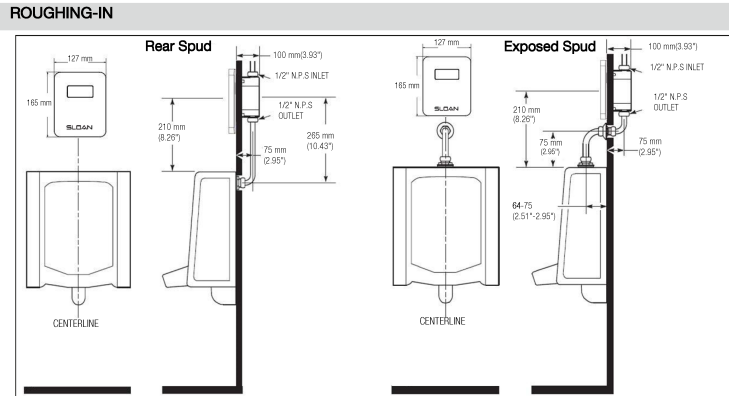

Sloan 10500 Seymour Ave, Franklin Park, IL 60131
 Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com