

CODE NUMBER

3362156IN

DESCRIPTION

4" Trim Plate, Battery Power Supply, Back-Check Tee, Polished Chrome Finish, 0.5 gpm, Multi-Laminar Spray, Infrared Sensor, Sloan® Battery-Powered Deck-Mounted Mid Body.

DETAILS

Flow Rate: 0.5 gpm (1.9 Lpm) (0.5GPM)
Spray Type: Multi-Laminar (MLM)

Sensor Type: Infrared
Mounting Type: Single Hole
Trim Plate: 4" (102mm) (4)
Power Supply: Battery (BAT)

• Temperature Mixer: Back-Check Tee (TEE)

• Finish: Polished Chrome (CP)

Factory Default Timeout: 30 secondsFactory Default Gallons per Cycle: 0.25

FEATURES

Commercial Grade, ADA Compliant, Electronic, Sensor-Activated, Brass Pedestal Hand Washing Faucet with the following features:

- Adjustable Infrared Sensor Range
- 36" (914 mm) Long Sensor Cable
- 24" (610 mm) Long Flex Hose
- Filtered Solenoid Valve with serviceable Strainer Filter
- Includes Four (4) AA-size Batteries
- Includes appropriate Mounting Hardware

ELECTRICAL SPECIFICATIONS

- Battery Life: 2 years 8,000 cycles/month
- Sensor Range: 4"-7" (102-178mm)
- Timeout Adjustment Settings: 30s

VIDEOS

SF-2100/2150/SF-2200/2250/SF-2300/2350/SF-2400/2450 Parts Breakdown


SF-2100/2150/SF-2200/2250/SF-2300/2350/SF-2400/2450 Module Replacement

SF-2100/2150/SF-2200/2250/SF-2300/2350/SF-2400/2450 Battery Replacement- Sensor Range Adjustment

DOWNLOADS

- SF Series Installation Instructions
- SF Series (FR) Installation Instructions
- SF Series (SP) Installation Instructions
- SFP 35-A Installation Instructions
- Trim Plate Guide
- Sloan 2400/2450 Repair and Maintenance Guide
- Faucet Spray Heads Repair and Maintenance Guide
- Additional Downloads





COMPLIANCES & CERTIFICATIONS



ASME



















(ADA Compliant, ASME A112.18.1 Compliant, cUPC Certified, UPC Certified, UPC Low Lead Compliant, cUPC Low Lead Compliant, IAPMO, WaterSense Listed, NSF-61, Proposition 65, WELL Building Standard)

NOTES

All information contained within this document subject to change without notice.

Looking for other variations of the SF-2450 product? View the general spec sheet with all options.

Find a matching soap dispenser for this faucet. Find a compatible sink for this faucet.


Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com



WARRANTY

View Warranty Information

ROUGH-IN

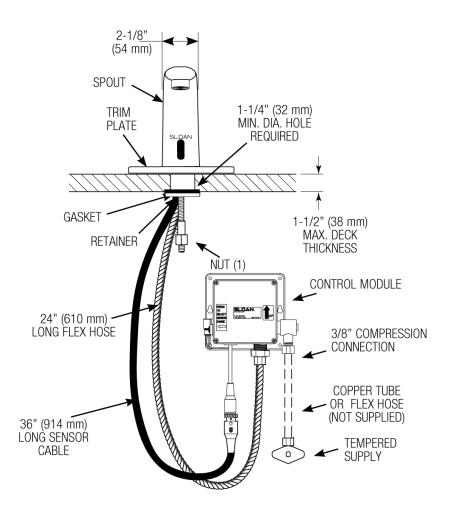

HOT AND COLD WATER SUPPLY APPLICATIONS

(SPECIFY IN MODEL VARIATION)

