

# MICROPlumb® EL 3AACMODAG\* PRODUCTS EL 3AALCMODAG\* Electronic Retrofit Flushometer Body



► **Description**  
 Concealed electronic operated water closet Flushometer body, for retrofit of handle-operated Flushometer. Ground-joint tailpiece (to retrofit Delany and Sloan ground-joint stops).


► **Flush Cycle**

- Model EL3AACMOD Water Saver (3.5 gpf/13.2 Lpf)
- Model EL3AALCMOD Low Consumption (1.6 gpf/6.0 Lpf)

► **Specifications**

- Concealed, electronic operated, diaphragm type, rough brass, closet Flushometer
- 24 VAC 50/60 Hz solenoid operator
- 15' cord w/ RJ-11 connection
- Dual filtered bypass diaphragm
- Permex® rubber diaphragm.
- Adjustable tailpiece

\*Required: H 130-A-1 RB ADJ/GJ Tail ASM 5" CL TO CL  
 Specify length required.

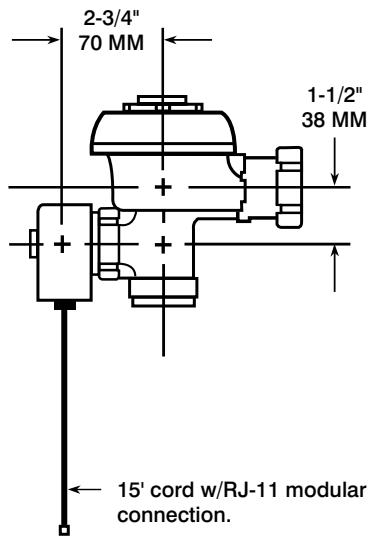

This space for Architect/Engineer approval

The information contained in this document is subject to change without notice.



10500 Seymour Avenue • Franklin Park, Illinois, 60131-1259  
 Phone 800-671-6970 • Fax 847-671-6944