

CODE NUMBER

3362182IN

DESCRIPTION

4" Trim Plate, Battery Power Supply, Back-Check Tee, Polished Chrome Finish, 0.35 gpm, Multi-Laminar Spray, Infrared Sensor, Sloan® Battery-Powered Deck-Mounted Low Body.

DETAILS

• Flow Rate: 0.35 gpm (1.3 Lpm) (0.35GPM)

• Spray Type: Multi-Laminar (MLM)

Sensor Type: Infrared
Mounting Type: Single Hole
Trim Plate: 4" (102mm) (4)
Power Supply: Battery (BAT)

• Temperature Mixer: Back-Check Tee (TEE)

• Finish: Polished Chrome (CP)

Factory Default Timeout: 30 secondsFactory Default Gallons per Cycle: 0.175

FEATURES

Commercial Grade, ADA Compliant, Electronic, Sensor-Activated, Brass Pedestal Hand Washing Faucet with the following features:

- Adjustable Infrared Sensor Range
- 36" (914 mm) Long Sensor Cable
- 24" (610 mm) Long Flex Hose
- Filtered Solenoid Valve with serviceable Strainer Filter
- Includes Four (4) AA-size Batteries
- Includes appropriate Mounting Hardware

ELECTRICAL SPECIFICATIONS

• Battery Life: 2 years 8,000 cycles/month

• Sensor Range: 4"-7" (102-178mm)

• Timeout Adjustment Settings: 30s

VIDEOS

SF-2100/2150/SF-2200/2250/SF-2300/2350/SF-2400/2450 Parts Breakdown


SF-2100/2150/SF-2200/2250/SF-2300/2350/SF-2400/2450 Module Replacement

SF-2100/2150/SF-2200/2250/SF-2300/2350/SF-2400/2450 Battery Replacement- Sensor Range Adjustment

DOWNLOADS

- SF Series Installation Instructions
- SF Series (FR) Installation Instructions
- SF Series (SP) Installation Instructions
- SFP 35-A Installation Instructions
- SF 2100/2150 Faucet Extension Installation Instructions
- Trim Plate Guide
- Sloan 2100/2150 Repair and Maintenance Guide
- Additional Downloads



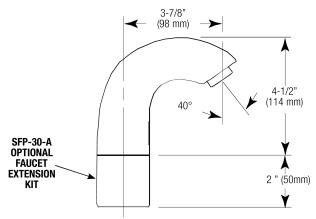

COMPLIANCES & CERTIFICATIONS

















WELL Building Standard)





NOTES

All information contained within this document subject to change without notice.

Looking for other variations of the SF-2150 product? View the general spec sheet with all options.


Find a matching soap dispenser for this faucet. Find a compatible sink for this faucet.

WARRANTY

View Warranty Information



ROUGH-IN

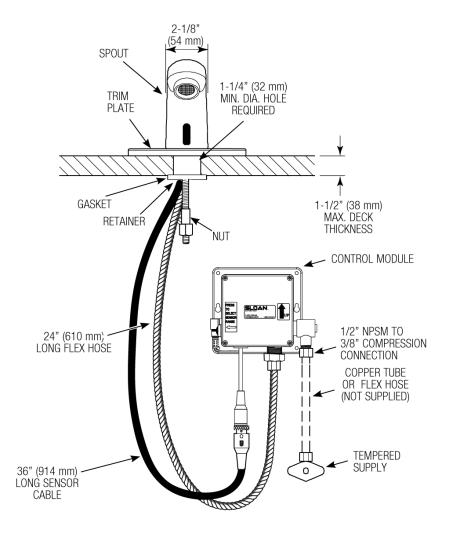

HOT AND COLD WATER SUPPLY APPLICATIONS

(SPECIFY IN MODEL VARIATION)

