SLOAN®

Efficiency Series

Model

ST-2022-1.6/1.1

ADA Compliant Dual Flush Vitreous China HET Water Closet

DESCRIPTION

Complete ADA Compliant Dual Flush Floor Mounted HET Vitreous China fixture.

Flush Cycle

Model ST-2022 Dual Flush

Full Flush 1.6 gpf/6.0 Lpf
Reduced Flush 1.1 gpf/4.2 Lpf

HET HIGH-EFFICIENCY TOILET

SPECIFICATIONS

Fixture

- ADA Compliant
- Vitreous China
- Dual Flush
- Floor Mounted
- Siphon Jet Flushing Action
- 1 1/2" I.P.S. top spud inlet
- 2 1/8" trapway diameter
- Fully Glazed Trapway
- Toilet Seat Not Included
- Integral Flushing Rim
- Elongated Bowl
- Water Spot Area 10" x 7 1/2"
- Closet Bolts and Caps Included
- Water closet compliant to the applicable sections of ASME A112.19.2/CSA B45.1

Colors/Finishes

- White

Recommended Accessories

- Toilet seat not included
- Compatible with Toilet Seat models:
  Olsonite 10CT
  Bemis 1955 CT
  Church Commercial 295CT

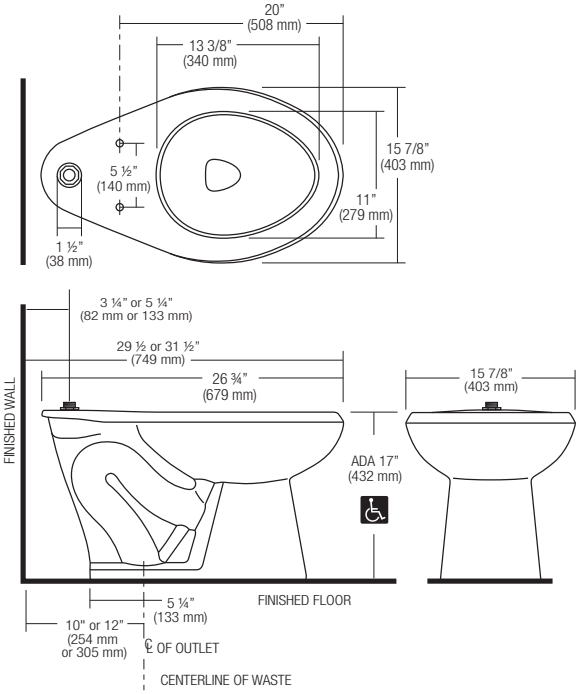

Product Specification

Elongated dual flush water closet shall be made of vitreous china with a 1.5" top spud. Bowl shall be ADA compliant when installed at required height of 17" from floor to top of fixture. Water closet shall be floor mounted. Water Closet shall use 1.6/1.1 gpf. Water Closet shall be Sloan Model ST-2022-1.6/1.1.

UPC C ® Listed by I.A.P.M.O.

Meets the American Disabilities Guidelines and ANSI A117.1 requirements when installed according to these requirements.

NOTE:
Plumbing System Requirements
√ Minimum Flowing Pressure: 25 PSI
√ Minimum Flow Rate: 18 GPM

U.S. GREEN BUILDING COUNCIL MEMBER

EPA GREEN POWER PARTNER

Sloan Valve Company is buying renewable energy certificates to meet 100% of the company's purchased electricity use at its Franklin Park, Illinois facility.

This space for Architect/Engineer approval

Job Name _____ Date _____

Model Specified _____ Quantity _____

Variations Specified _____

Customer/Wholesaler _____

Contractor _____

Architect _____

The information contained in this document is subject to change without notice.

SLOAN®

Sloan Valve Company
10500 Seymour Avenue,
Franklin Park, IL 60131
Phone: 1-800-9-VALVE-9 (982-5839)
or 1-847-671-4300
Fax: 1-800-447-8329 or 1-847-671-4380
www.sloanvalve.com

Copyright © 2010 Sloan Valve Company

10/10 Rev. 0c